



HTM19264C-25W-N5P

产品名称 (Product name) : 黑白点阵模组
型 号 (Model) HTM19264C-25W-N5P
编 号 (Part number) 20140708
日 期 (Date) 2014-07-15

受 检

深圳市鑫洪泰电子科技有限公司
Shenzhen Hot Display Technology Co.,Ltd

编制	审核	核准
Prepared by	Checked by	Approved by
编码: QR-R-011 A/0	序号:	

Rev.	Descriptions	Date
01	Preliminary Release	2014-07-15

Table of Content

1. Basic Specifications	3
1.1 Display Specifications	3
1.2 Mechanical Specifications	3
1.3 Circuit Diagram	3
1.4 Terminal Function	4
1.5 Product Outline	5
1.6 Schematic Diagram	6
2. Absolute Maximum Ratings	7
3. Electrical Characteristics	7
3.1 DC Characteristics	7
3.2 LED Backlight Circuit	7
3.3 AC Characteristics	8
3.4 Reset Timing	10
4. Function specifications	11
4.1 The Parallel Interface	11
4.2 Display Memory Map	11
4.3 Display Commands	12
4.4 Basic Operating Sequence	13
5. Inspection Standards	14
6. Handling Precautions	15
6.1 Mounting method	15
6.2 Cautions of LCD handling and cleaning	15
6.3 Caution against static charge	15
6.4 Packaging	15
6.5 Caution for operation	15
6.6 Storage	15
6.7 Safety	15
7. Packaging specifications	16






1. Basic Specifications

1.1 Display Specifications


- | | |
|--------------------|-------------------------------------|
| 1>LCD Display Mode | : STN, Negative, Blue, Transmissive |
| 2>Viewing Angle | : 6H |
| 3>Driving Method | : 1/64 Duty, 1/9 Bias |

4 > Backlight

- ## 1.2 Mechanical Specifications

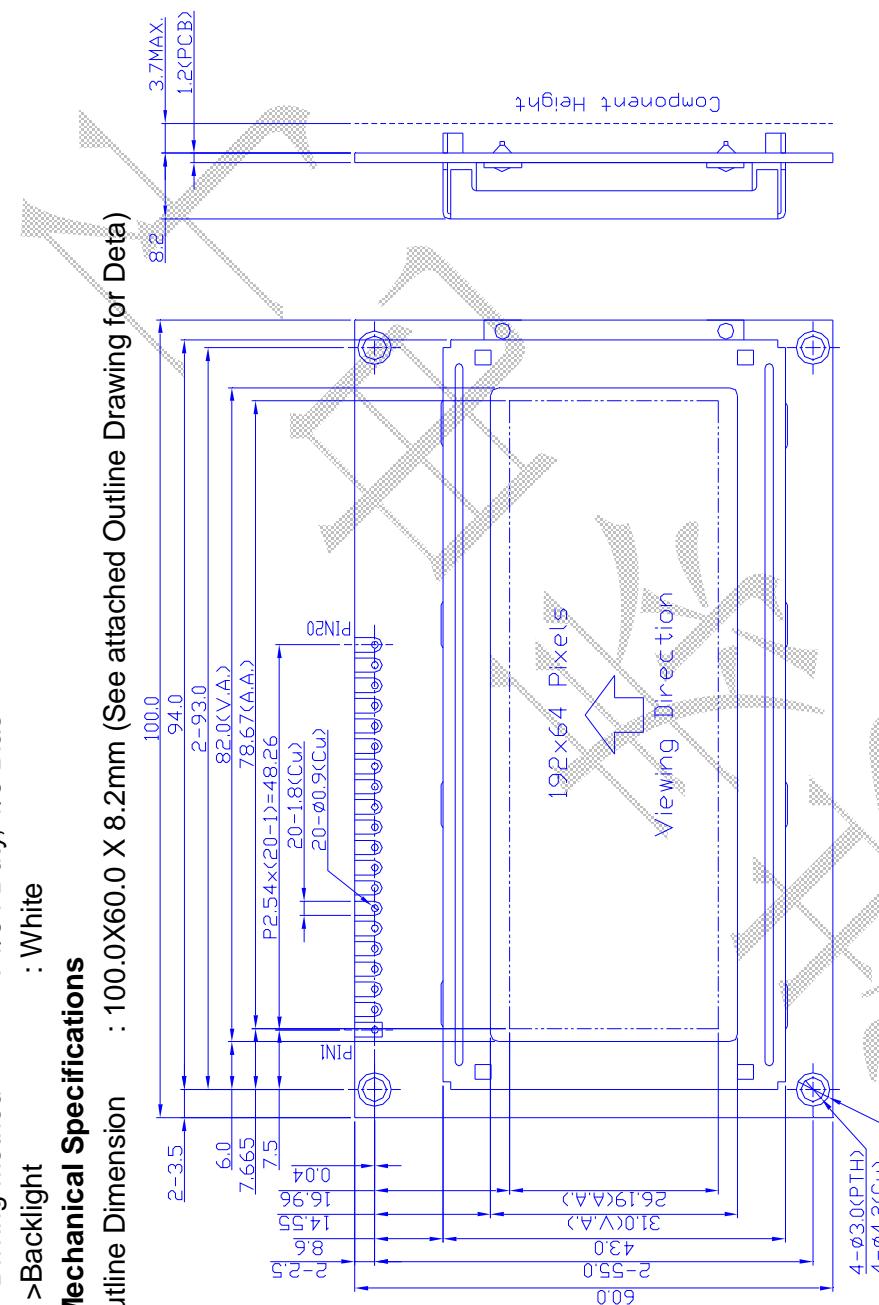

1.3 Circuit Diagram

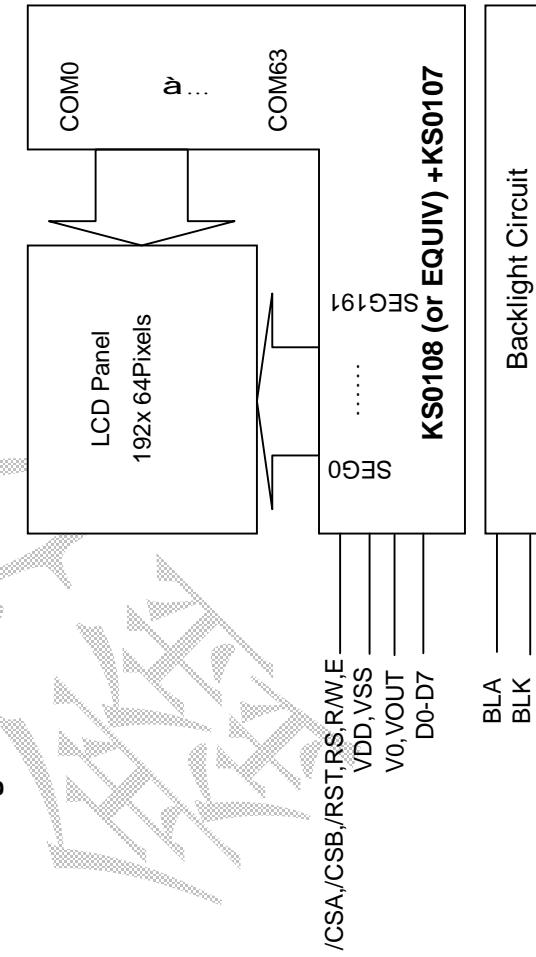



为客户提供专业的显示解决方案


HTM19264C-25W-N5P

1.4 Terminal Function

Pin No.	Pin Name	Function
1~8	D7~D0	Data Buss
9	E	Enable signal.
10	R/W	H:Read ; L: Write.
11	RS	H:Data; L: Instruction
12	V0	LCM Adjust Contrast
13	VDD	Power Supply Positive(5.0V)
14	VSS	Power Supply Negative(0V)
15	/CSA	Chip selection input 1
16	/CSB	Chip selection input 2
17	VOUT	About(-10)V
18	/RST	Reset Signal input
19	BLA	Bcklight Positive(5.0V)
20	BLK	Bcklight Negative(VSS)



1.5 Product Outline

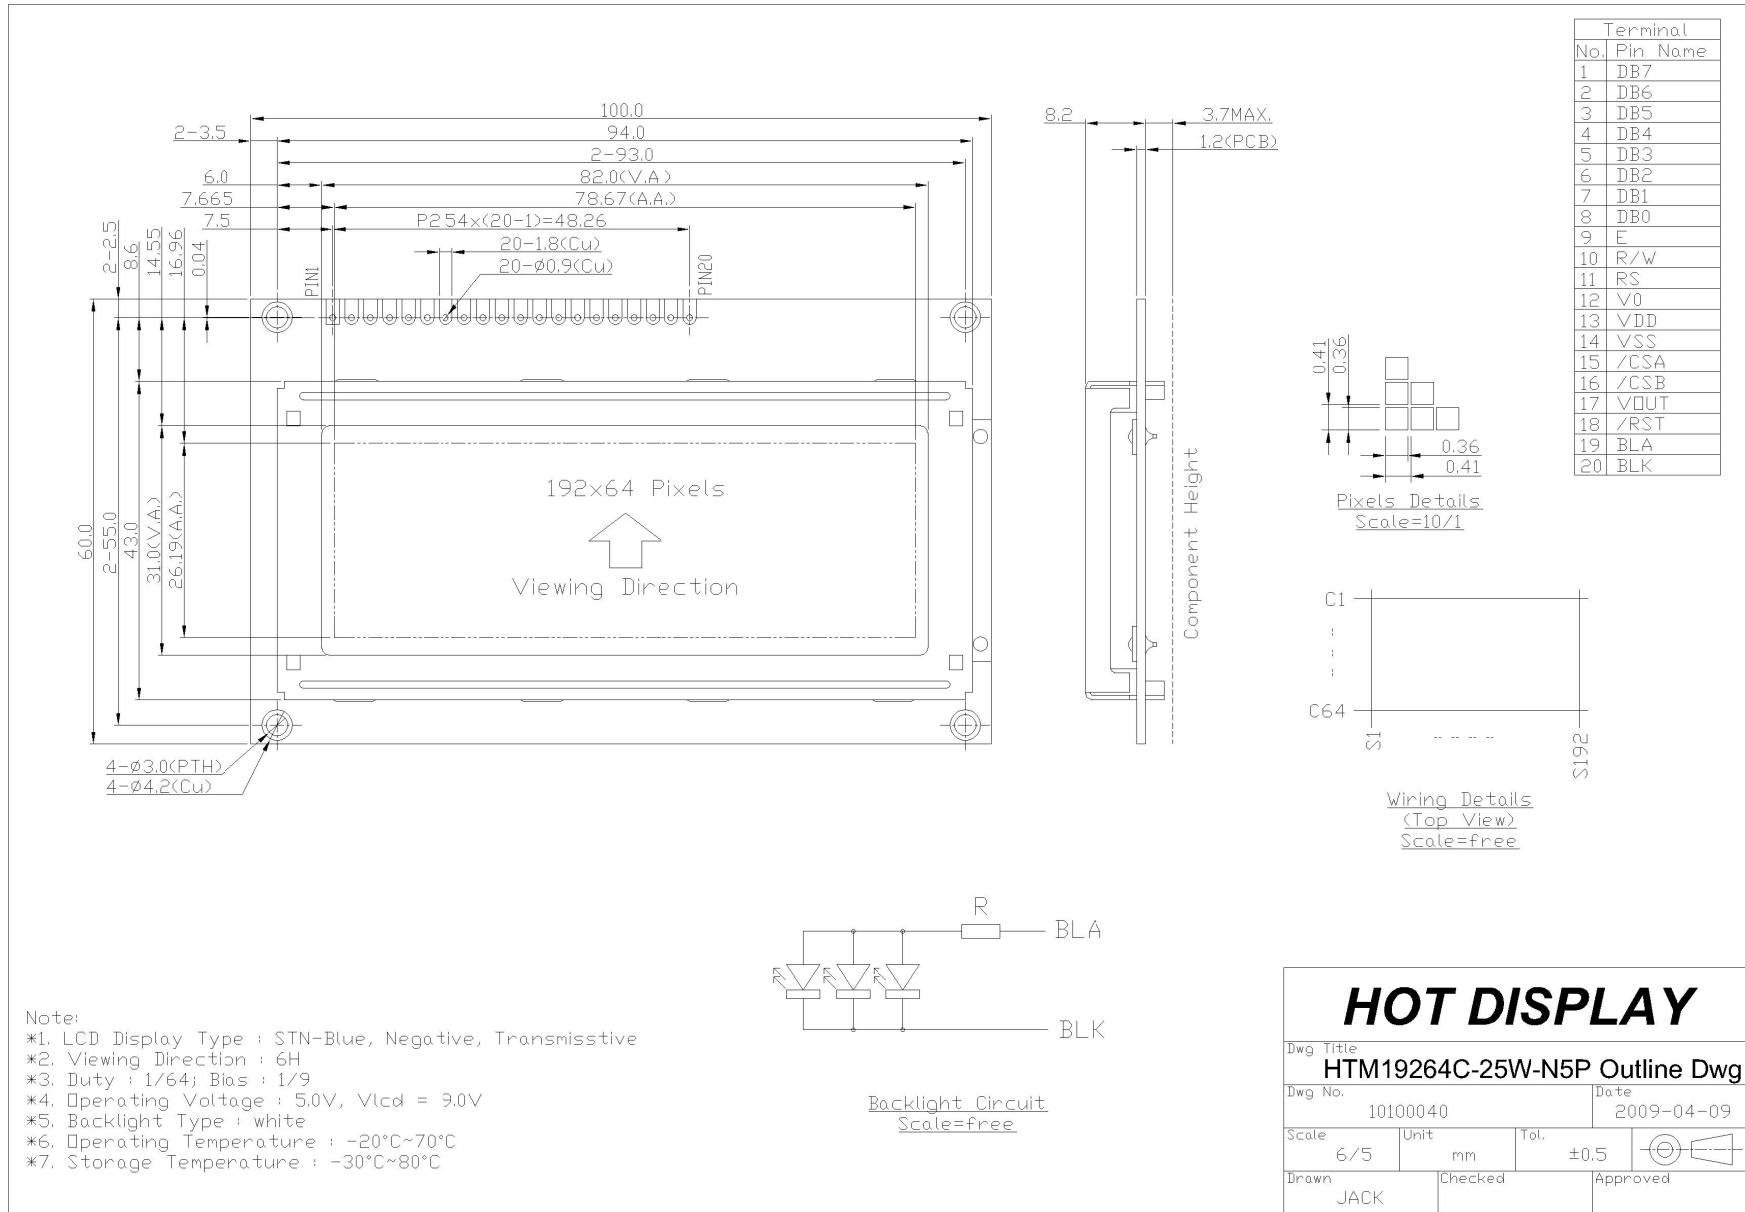


HOT DISPLAY			
Dwg Title: HTM19264C-25W-N5P Outline Dwg			
Dwg No.: 10100040	Date: 2009-04-09		
Scale: 6/5	Unit: mm	Tol.: ±0.5	
Drawn: JACK	Checked:	Approved:	



为客户提供专业的显示解决方案

HTM19264C-25W-N5P

1.6 Schematic Diagram

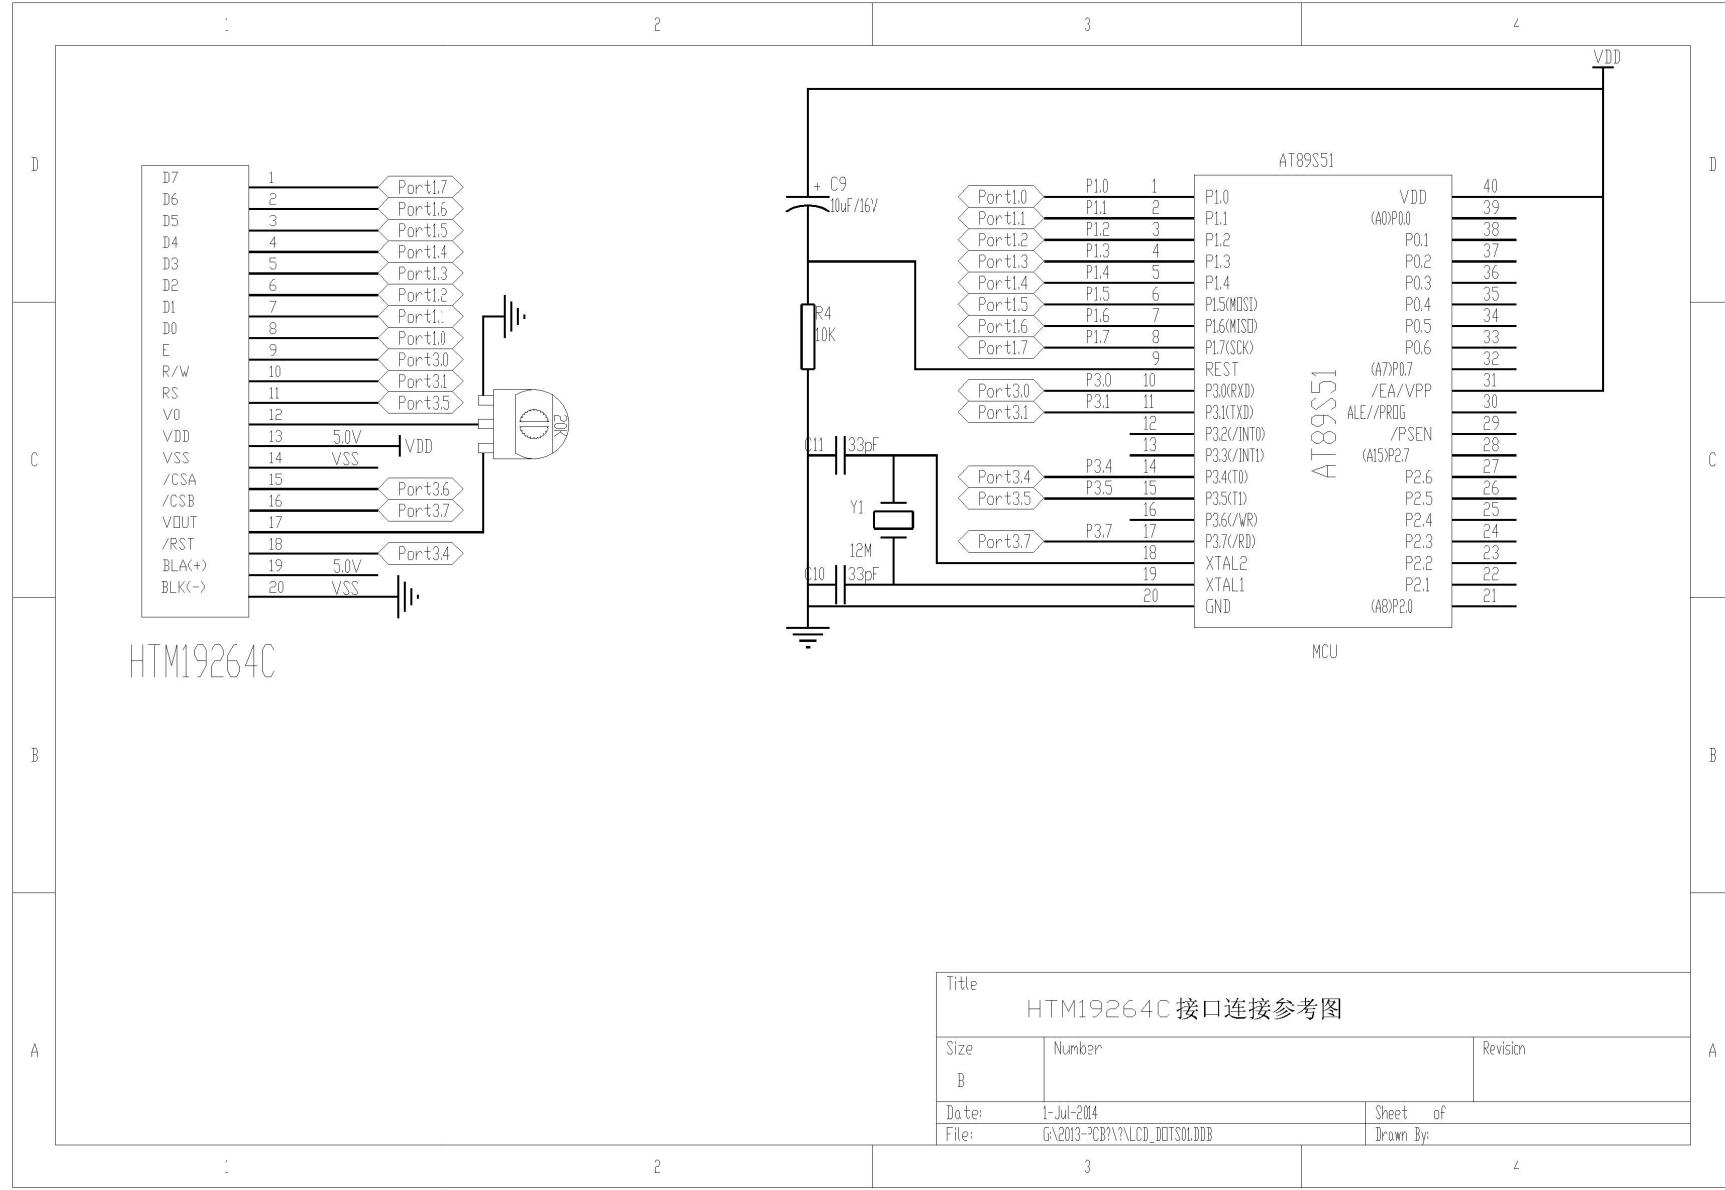

2. Absolute Maximum Ratings

Characteristic	Symbol	Value	Unit	Note
Operating Voltage	V_{DD}	-0.3~+7.0	V	*1
Supply Voltage	V_{EE}	$V_{DD}-19.0-V_{DD}+0.3$	V	*4
Driver Supply Voltage	V_B	-0.3~ $V_{DD}+0.3$	V	*1,3
Operating Temperature	T_{OPR}	$V_{EE}-0.3-V_{DD}+0.3$	V	*2
Storage Temperature	T_{STG}	-30~+85	°C	
		-55~+125	°C	

3. Electrical Characteristics

3.1 DC Characteristics

DC Characteristics $V_{DD}=4.5\sim 5.5V$, $V_{SS}=0V$, $V_{DD}-V_{EE}=8\sim 17V$, $T_a=-30\sim +85^{\circ}C$)

Characteristic	Symbol	Condition	Min	Typ.	Max	Unit	Note
Input High Voltage	V_{IH}	-	0.7 V_{DD}	-	V_{DD}	V	*1
Input Low Voltage	V_{IL}	-	2.0	-	V_{DD}	V	*2
V_{IL1}	-	0	-	0.3 V_{DD}	V	*1	
V_{IL2}	-	0	-	0.8	V	*2	
Output High Voltage	V_{OH}	$I_{OL}=200\mu A$	2.4	-	-	V	*3
Output Low Voltage	V_{OL}	$I_{OL}=1.6mA$	-	-	0.4	V	*3
Input Leakage Current	I_{IKS}	$V_H=V_{SS}\sim V_{DD}$	-1.0	-	1.0	μA	*4
Three-state(OFF) Input Current	I_{ISL}	$V_H=V_{SS}\sim V_{DD}$	-5.0	-	5.0	μA	*5
Driver Input Leakage Current	I_{IHL}	$V_H=V_{EE}\sim V_{DD}$	-2.0	-	2.0	μA	*6
Operating Current	I_{OP1}	During Display	-	-	100	μA	*7
	I_{OP2}	During Access	-	-	500	μA	*7
On Resistance	R_{ON}	$V_{DD}-V_{EE}=15V$ $ I_{LOAD} =0.1mA$	-	-	7.5	kΩ	*8

*1. CL, FRM, M, RSTB, CLK1, CLK2

2. CS1B, CS2B, CS3, E, RW, RS, DB0~DB7

3. DB0~DB7

4. Excepted DB0~DB7

5. DB0~DB7 at High Impedance

6. $V_{OL}(R), V_{2L}(R), V_{3L}(R), V_{5L}(R)$


7. 1/64 duty, FCL K=250KHZ, Frame Frequency=70HZ, Output: No Load

8. $V_{DD}\sim V_{EE}=15.5V$

$V_{OL}(R)>V_{2L}(R)=V_{DD}-2/7(V_{DD}-V_{EE})>V_{3L}(R)=V_{EE}+2/7(V_{DD}-V_{EE})>V_{5L}(R)$

3.2 LED Backlight Circuit


Items	Symbol	MIN.	Typ.	MAX.	Unit	Condition
Forward Voltage	V_f	BLA	-	3.1	-	V
Forward Current	If	BLA	-	40	60	mA

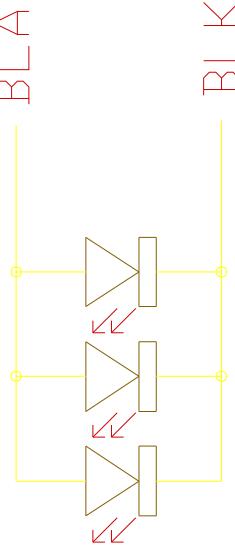

3.3 AC Characteristics


(1) Clock Timing

Characteristic	Symbol	Min	Typ	Max	Unit
CLK1, CLK2 Cycle Time	t_{CY}	2.5	-	20	us
CLK1 · LOW· Level Width	t_{WL1}	625	-	-	ns
CLK2 · LOW· Level Width	t_{WL2}	625	-	-	ns
CLK1 · HIGH· Level Width	t_{WH1}	1875	-	-	ns
CLK2 · HIGH· Level Width	t_{WH2}	1875	-	-	ns
CLK1-CLK2 Phase Difference	t_{PH12}	625	-	-	ns
CLK2-CLK1 Phase Difference	t_{PH21}	625	-	-	ns
CLK1, CLK2 Rise Time	t_R	-	-	150	ns
CLK1, CLK2 Fall Time	t_F	-	-	150	ns

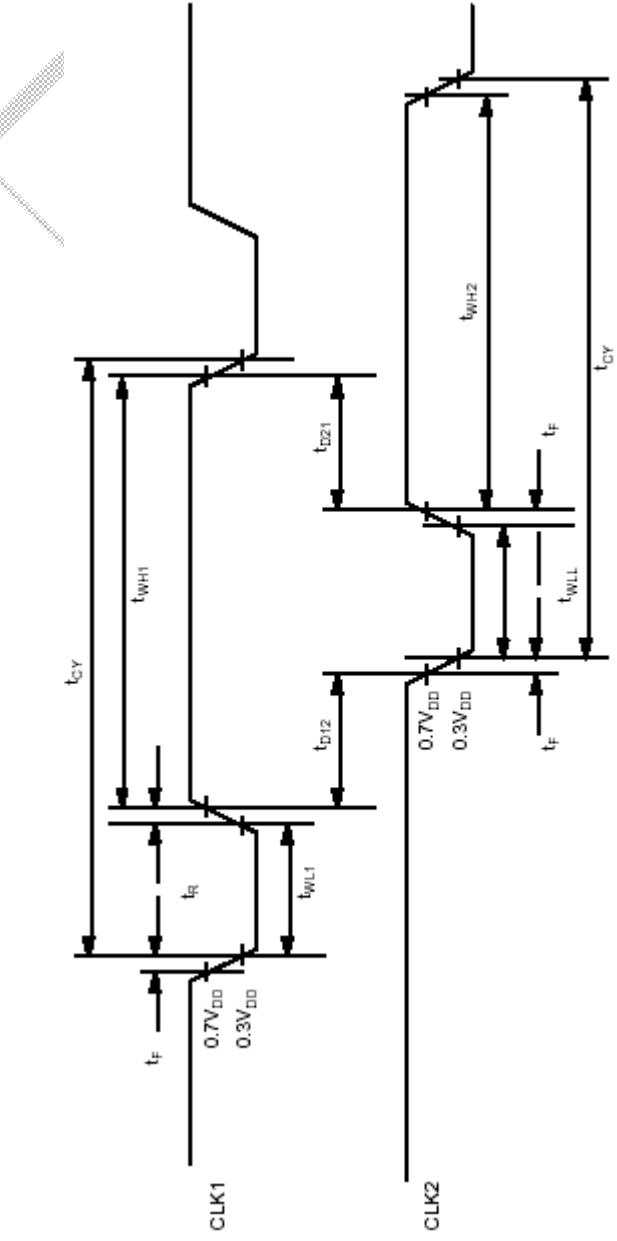

(2) Display Control Timing

Characteristic	Symbol	Min	Typ	Max	Unit
FRM Delay Time	t_{DF}	-2	-	+2	us
M Delay Time	t_{DM}	-2	-	+2	us
CL · LOW· Level Width	t_{WL}	35	-	-	us
CL · HIGH· Level Width	t_{WH}	35	-	-	us

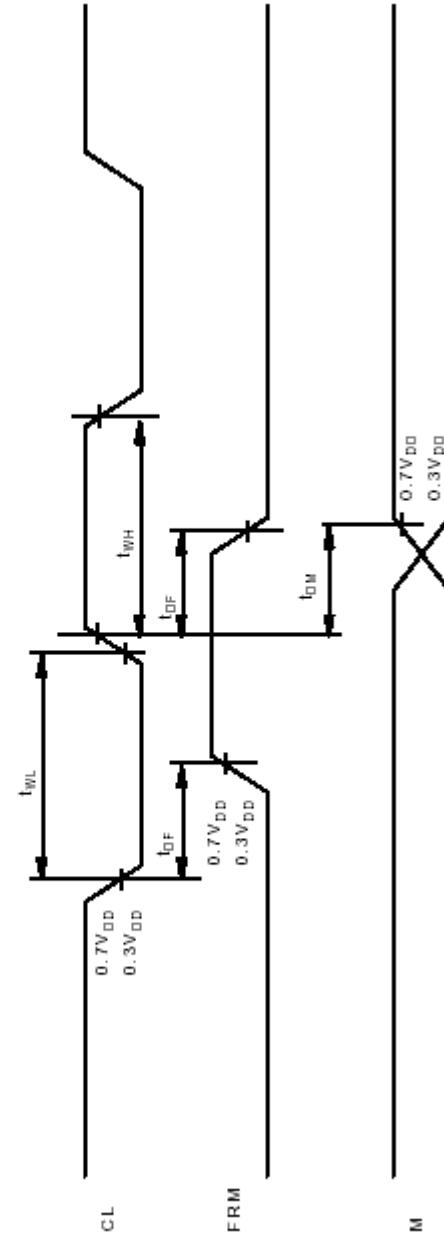




霍士
HOT DISPLAY 为您提供专业的显示解决方案


HTM19264C-25W-N5P

(3) MPU Interface

Characteristic	Symbol	Min	Typ	Max	Unit
E Cycle	t_C	1000	-	-	ns
E High Level Width	t_{WH}	450	-	-	ns
E Low Level Width	t_{WL}	450	-	-	ns
E Rise Time	t_R	-	-	25	ns
E Fall Time	t_F	-	-	25	ns
Address Set-Up Time	t_{ASU}	140	-	-	ns
Address Hold Time	t_{AH}	10	-	-	ns
Data Set-Up Time	t_{DSU}	200	-	-	ns
Data Delay Time	t_D	-	-	320	ns
Data Hold Time (Write)	t_{HWW}	10	-	-	ns
Data Hold Time (Read)	t_{HWR}	20	-	-	ns

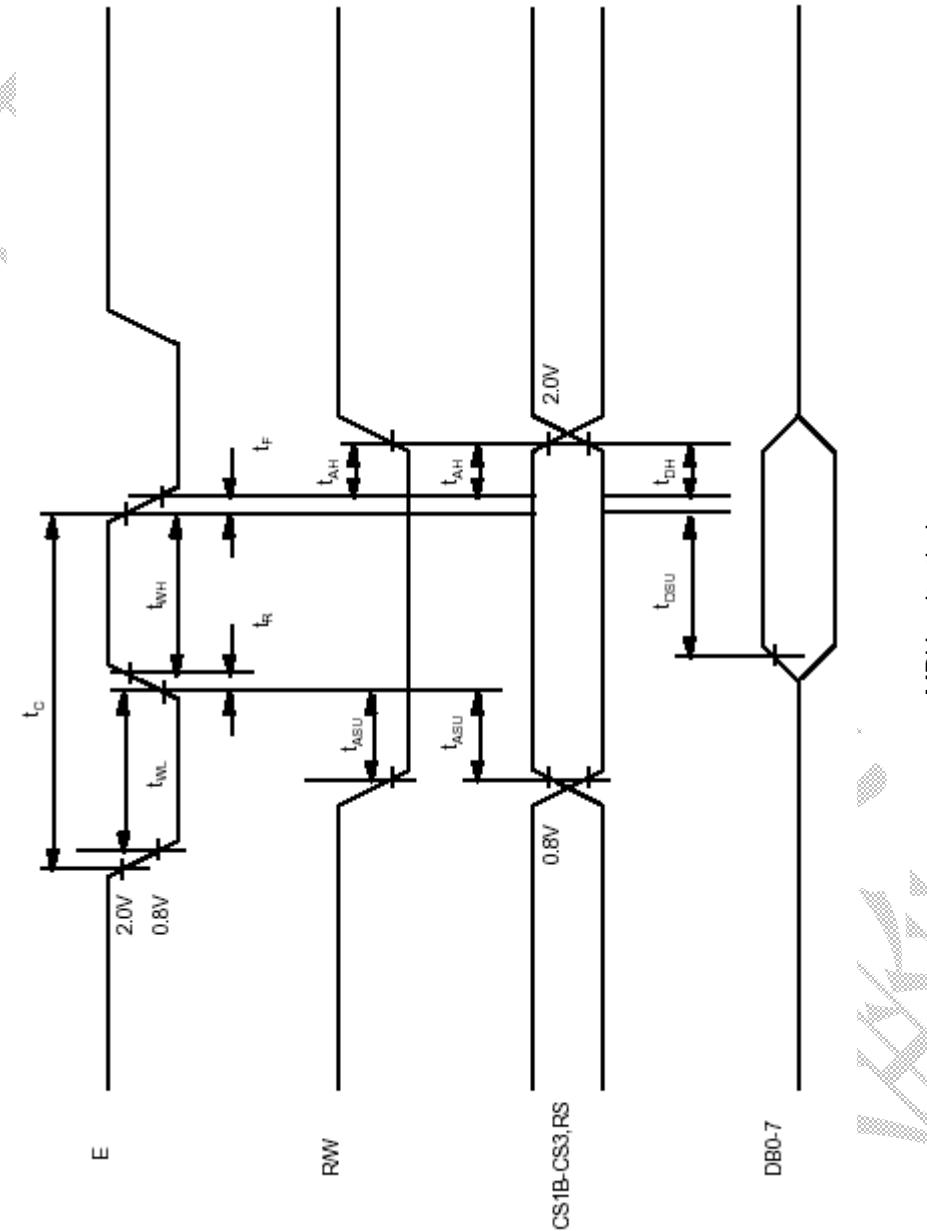


MPU write timing

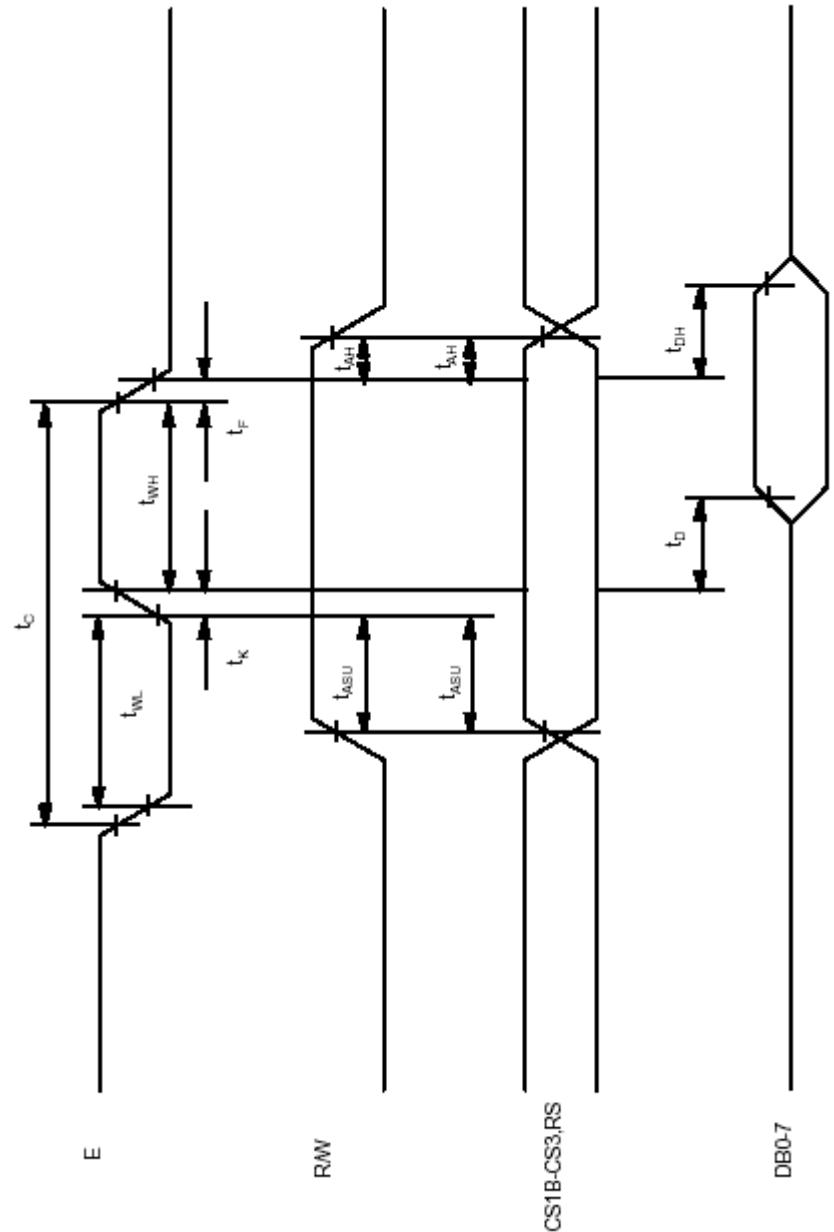

MPU read timing

3.4 Rest Timing

Item	Symbol	Min	Typ	Max	Unit
Reset Time	t _{RS}	1.0	-	-	μs
Rise Time	t _R	-	-	-	ns

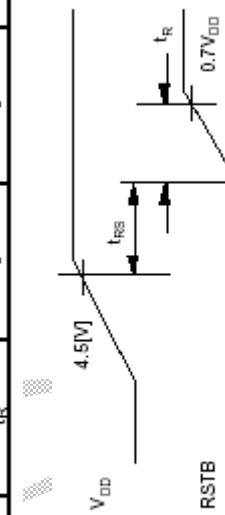

4. Function specifications


4.1 The Parallel Interface

	Area Selection		Shared	6800 Mode		Function(6800)	
	/CSB	/CSA	A0	R/W	E		
Left (0)	0	0	H	H	H	Reads the display data	
Middle(1)	0	1	H	L	Hà L	Writes the display data	
Right(2)	1	0	L	H	H	Status read	
			L	L	Hà L	Write Command data	

4.2 Display Memory Map

PAGE	COL			SEG			SEG190	SEG191
	SEG0	SEG1	SEG2	SEG3	SEG4	SEG5		
PAGE0	D7	D7	---	---	---	---	D7	D7
	1	1	0	0	0	0	1	1
PAGE1	D0	D0	---	---	---	---	D0	D0
	1	1	1	1	1	1	1	1
PAGE2	---	---	---	---	---	---	---	---
PAGE3	---	---	---	---	---	---	---	---
PAGE4	---	---	---	---	---	---	---	---
PAGE5	---	---	---	---	---	---	---	---
PAGE6	D7	D7	---	---	---	---	D7	D7
	1	1	0	0	0	0	1	1
PAGE7	D0	D0	---	---	---	---	D0	D0
	1	1	1	1	1	1	1	1

Pixels:192X64

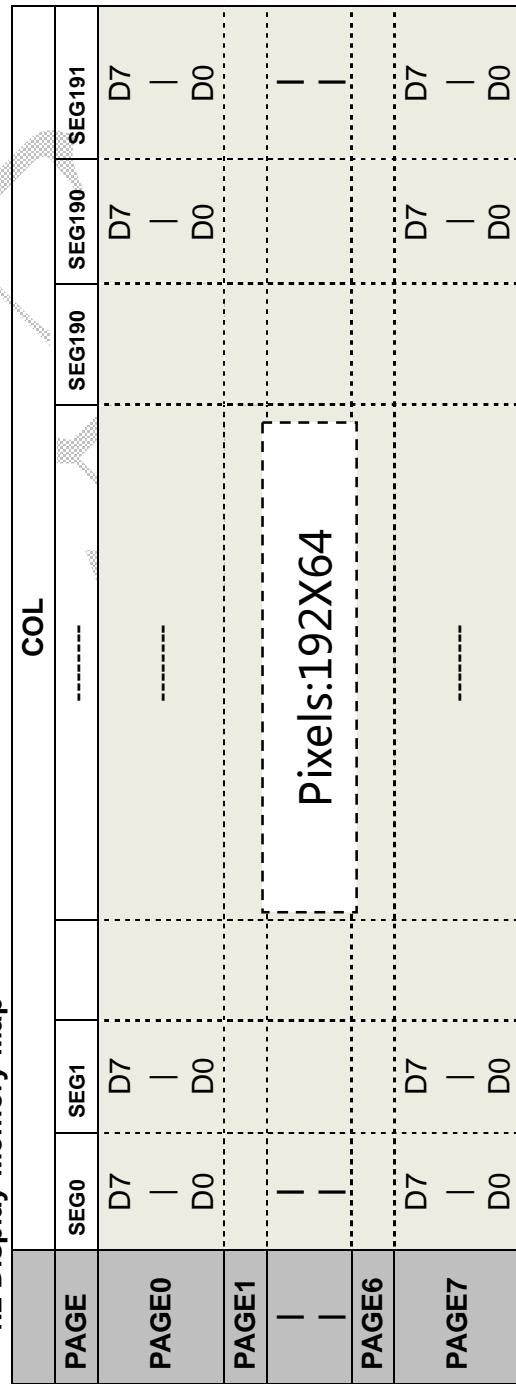



4.3 Display Commands

The display control instructions control the internal state of the KS0108B. Instruction is received from MPU to KS0108B for the display control. The following table shows various instructions.

Instruction	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Function
Display ON/OFF	L	L	L	H	H	H	H	H	H	L/H	Controls the display on or off. Internal status and display RAM data is not affected.
Set Address	L	L	L	H							Sets the Y address in the Y address counter.
Set Page (X address)	L	L	H	L	H	H	H				Sets the X address at the X address register.
Display Start Line	L	L	H	H							Indicates the display data RAM displayed at the top of the screen.
Status Read	L	H	B	L	O	N	R	L	L	L	Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset
			U	/	S	E	T				
			S	O	F						
Write Display Data	H	L									Writes data (DB0:7) into display data RAM. After writing instruction, Y address is increased by 1 automatically.
Read Display Data		H									Reads data (DB0:7) from display data RAM to the data bus.

Reference code

```

void Cselect()
{
    if(chip_select==0)
    {
        CSA=0;CSB=0;
    }
    if(chip_select==1)
    {
        CSA=1;CSB=0;
    }
    if(chip_select==2)
    {
        CSA=0;CSB=1;
    }
}

void WriteData(uchar dat)
{
    {
        Cselect();
        R_S=1;
        RW=0;
        P1=dat;
        E=1;
        E=0;
        CSA=1;CSB=1;
    }
}

void Setadd(uchar column,uchar page)
{
    if(column<64)
        chip_select=0;
    else
    {
        if(column>127)
            chip_select=2;
        column=128;
    }
}


```




霍士
HOT DISPLAY 为您提供专业的显示解决方案

4.4 Basic Operating Sequence Initialization Sequence

HTM19264C-25W-N5P

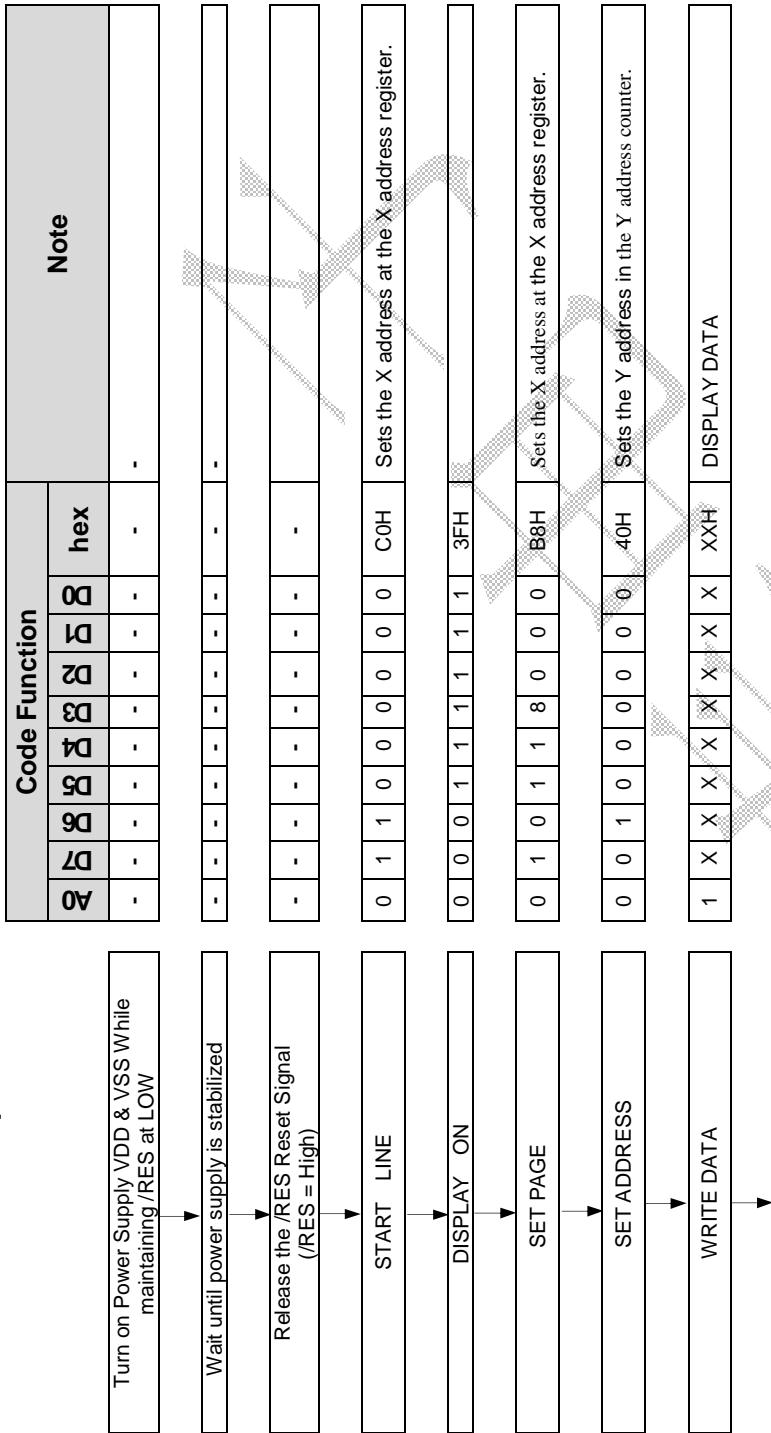

5. Inspection Standards

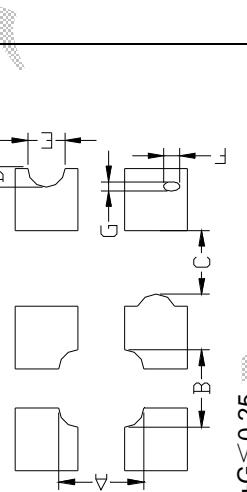Item	Criterion for defects				Defect type
1) Display on inspection	(1) Non display (3) Horizontal line is deficient	(2) Vertical line is deficient (4) Cross line is deficient			Major
2) Black / White spot	Size Φ (mm) $\Phi \leq 0.3$ $0.3 < \Phi \leq 0.45$ $0.45 < \Phi \leq 0.6$ $0.6 < \Phi$	Acceptable number Ignore (note) 3 1 0			Minor
3) Black / White line	Length (mm) $L \leq 10$ $5.0 \leq L \leq 10$ $5.0 \leq L \leq 10$ $1.0 \leq L \leq 10$ $1.0 \leq L \leq 10$ $L \leq 10$	Width (mm) $W \leq 0.03$ $0.03 < W \leq 0.04$ $0.04 < W \leq 0.05$ $0.05 < W \leq 0.06$ $0.06 < W \leq 0.08$ $0.08 < W$	Acceptable number Ignore 3 2 2 1 follows 2) point defect Defects separate with each other at an interval of more than 20mm		Minor
4) Display pattern					
5) Spot-like contrast irregularity	$\frac{A+B}{2} \leq 0.28$ $0 < C \leq \frac{D+E}{2} \leq 0.25$ $F+G \leq 0.25$	$\frac{A+B}{2}$ $0 < C \leq \frac{D+E}{2}$ $F+G \leq 0.25$	Note: 1) Up to 3 damages acceptable 2) Not allowed if there are two or more pinholes every three-fourth inch.		
6) Bubbles in polarizer	Size Φ (mm) $\Phi \leq 0.7$ $0.7 < \Phi \leq 1.0$ $1.0 < \Phi \leq 1.5$ $1.5 < \Phi$	Acceptable Number Ignore (note) 3 1 0	Note: 1) Conformed to limit samples. 2) Intervals of defects are more than 30mm.		Minor
7) Scratches and dent on the polarizer	Scratches and dent on the polarizer shall be in the accordance with "2)"				Minor
8) Stains on the surface of LCD panel	Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.				Minor
9) Rainbow color	No rainbow color is allowed in the optimum contrast on state within the active area.				Minor
10) Viewing area encroachment	Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.				Minor
11) Bezel appearance	Rust and deep damages that are visible in the bezel are rejected.				Minor
12) Defect of land contact	Evident crevices that are visible are rejected.				Minor
13) Parts mounting	(1) Failure to mount parts (2) Parts not in the specifications are mounted (3) For example: Polarity is reversed, HSC or TCP falls off.				Minor
14) Part alignment	(1) LSI, IC lead width is more than 50% beyond pad outline. (2) More than 50% of LSI, IC leads is off the pad outline.				Minor
15) Conductive foreign matter (solder ball, solder hips)	(1) $0.45 < \Phi, N \geq 1$ (2) $0.3 < \Phi \leq 0.45, N \geq 1$, $\Phi : \text{Average diameter of solder ball (unit: mm)}$ (3) $0.5 < L, N \geq 1, L : \text{Average length of solder chip (unit: mm)}$ Bezel claw missing or not bent				Minor
16) Bezel flaw	(1) Failure to stamp or label error, or not legible. (all acceptable if legible) (2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.				Minor
17) Indication on name plate (sampling indication label)					Minor

6. Handling Precautions

6.1 Mounting method

A panel of LCD module made by our company consists of two thin glass plates with polarizers that easily get damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board (PCB), extreme care should be used when handling the LCD modules.

6.2 Cautions of LCD handling and cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
 - Ethyl alcohol
 - Trichlorotrifluoroethane
- Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.
- Do not use the following solvent:
- Water
 - Ketene
 - Aromatics

6.3 Caution against static charge

The LCD module use C-MOS LSI drivers. So we recommend you:

Connect any unused input terminal to V_{dd} or V_{ss} . Do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

6.4 Packaging

-Module employs LCD elements, and must be treated as such. Avoid intense shock and falls from a height.
-To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity.

6.5 Caution for operation

-It is an indispensable condition to drive LCD module within the limits of the specified voltage since the higher voltage over the limits may cause the shorter life of LCD module.

-An electrochemical reaction due to DC (direct current) causes LCD undesirable deterioration so that the uses of DC (direct current) drive should be avoided.

-Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD module may show dark color in them. However those phenomena do not mean malfunction or out of order of LCD module, which will come back in the specified operating temperature.

6.6 Storage

In the case of storing for a long period of time, the following ways are recommended:

- Storage in polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with not desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping the storage temperature range.
- Storing with no touch on polarizer surface by any thing else.

6.7 Safety

- It is recommendable to crash damaged or unnecessary LCD into pieces and to wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well at once with soap and water.

7. Packaging Specifications

鑫 洪泰		Packaging Specifications		
		HTM19264C		

6.1 Packaging Material

No	Item	Dimensions (mm)	1PCS Weight (KG)	Quantity	Total Weight
1	LCM	100.0*60.0*10.7	0.059	180	10.6
2	PE Bag	130*80	0.001	180	0.18
3	Foam Rubber Cushion	310*170	0.0175	12	0.21
4	Partition A1	310*170*100	0.30	6	1.8
5	Product Box	330*180*120 (neutral packing)	0.45	6	2.7
6	Carton	480*390*330 (neutral packing)	1.0	1	1.0
7	Tape			AR	
8	Label Specifications			1	
9	Label Rohs			1	
10	Label ESD			1	

6.2. Total LCD Weight in carton: 16.5 KG±10%

6.3. Packaging Specifications and Quantity:

(1) Quantity Of Spacer:A1*6

(2) Total LCM quantity in carton: quantity per box 50* no of boxes 6 = 180

